




90° BEND

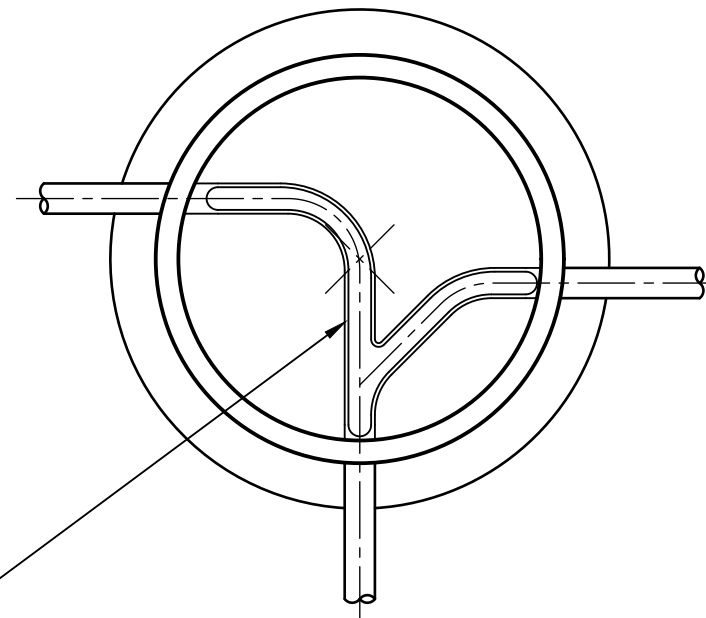

TYPICAL PLAN VIEWS OF MAINTENANCE HOLE JUNCTIONS WITH GULLETS FORMED USING UPVC PIPES CUT TO HALF DIAMETER

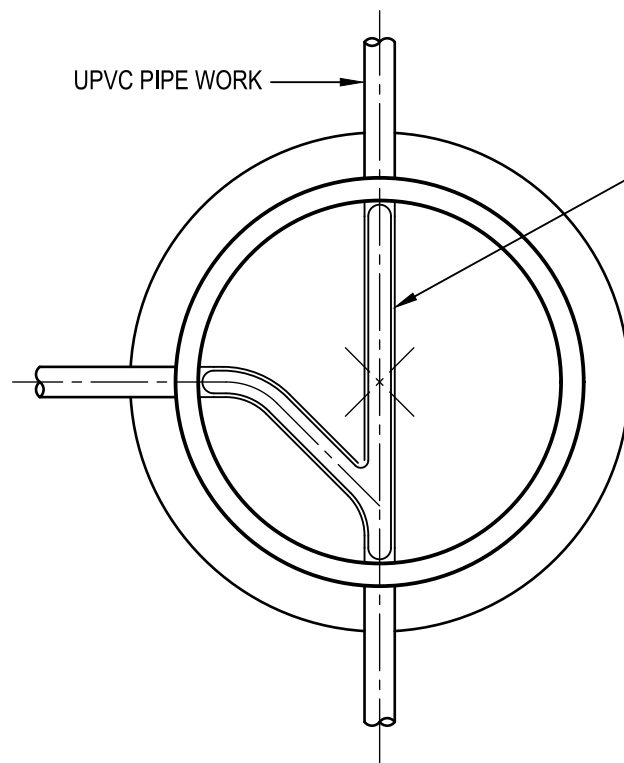

UPVC PIPE WORK

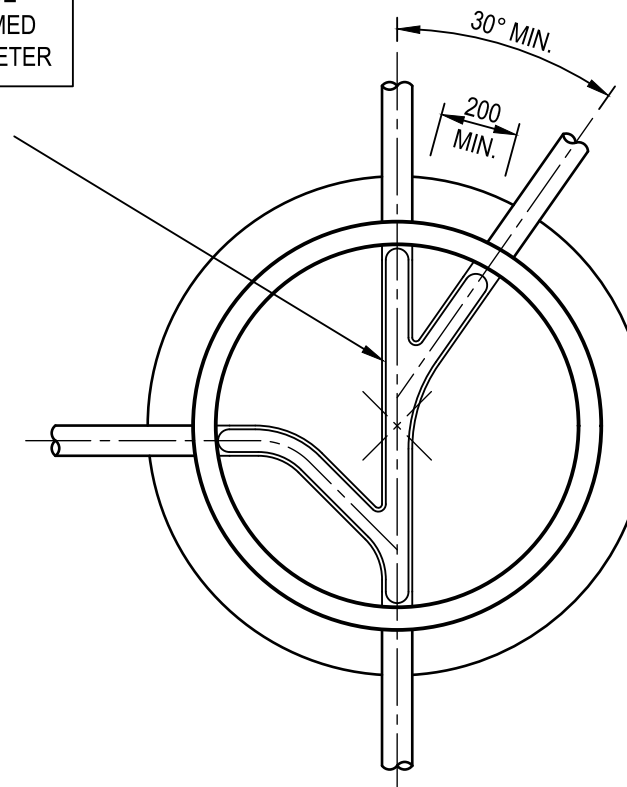

30° MIN.


200 MIN.

NOTE: APPROVED PRECAST CONCRETE BASES WITH PRE-BENCHED GULLIES TO SUIT PIPE CONFIGURATION CAN BE USED

JUNCTION & BEND


MULTIPLE ENTRY DETAILS

TYPICAL MAINTENANCE HOLE PIPE CONFIGURATIONS

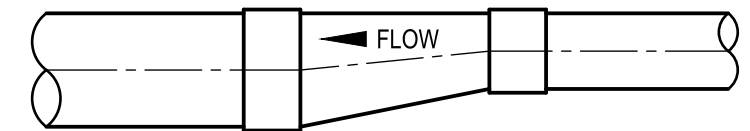

NOTE: ALL PIPES TO JOIN SOFFIT TO SOFFIT

TYPICAL PIPE REDUCTION OUTSIDE MAINTENANCE HOLE

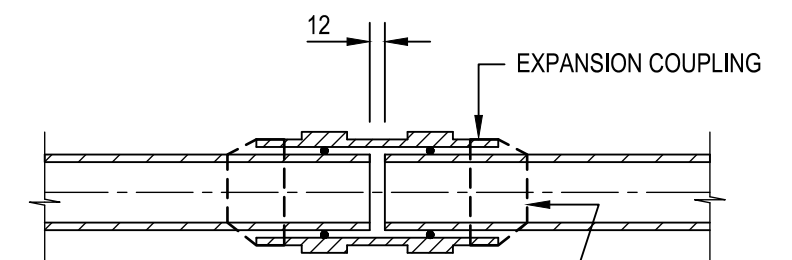

NOTE: EXPANSION COUPLINGS TO BE FITTED WITHIN 450mm OF ALL MAINTENANCE HOLE AND PUMP SUMP ENTRY AND MAINTENANCE HOLE EXITS. TO BE WRAPPED IN DENSO TAPE.

EXPANSION JOINT DETAIL

1:10



Local Government Association
of South Australia

LOCAL GOVERNMENT ASSOCIATION
SEPTIC TANK EFFLUENT DRAINAGE SCHEME - STANDARD DRAWINGS
MAINTENANCE HOLE JUNCTION DETAILS ©

Scales	Date	Validity	Drawing Number	Rev.
AS SHOWN	SEP. 2019	SEP. 2024		
Drawn C.J.H.	Design T.B.	Approved N.S.	SD - 06	Ø